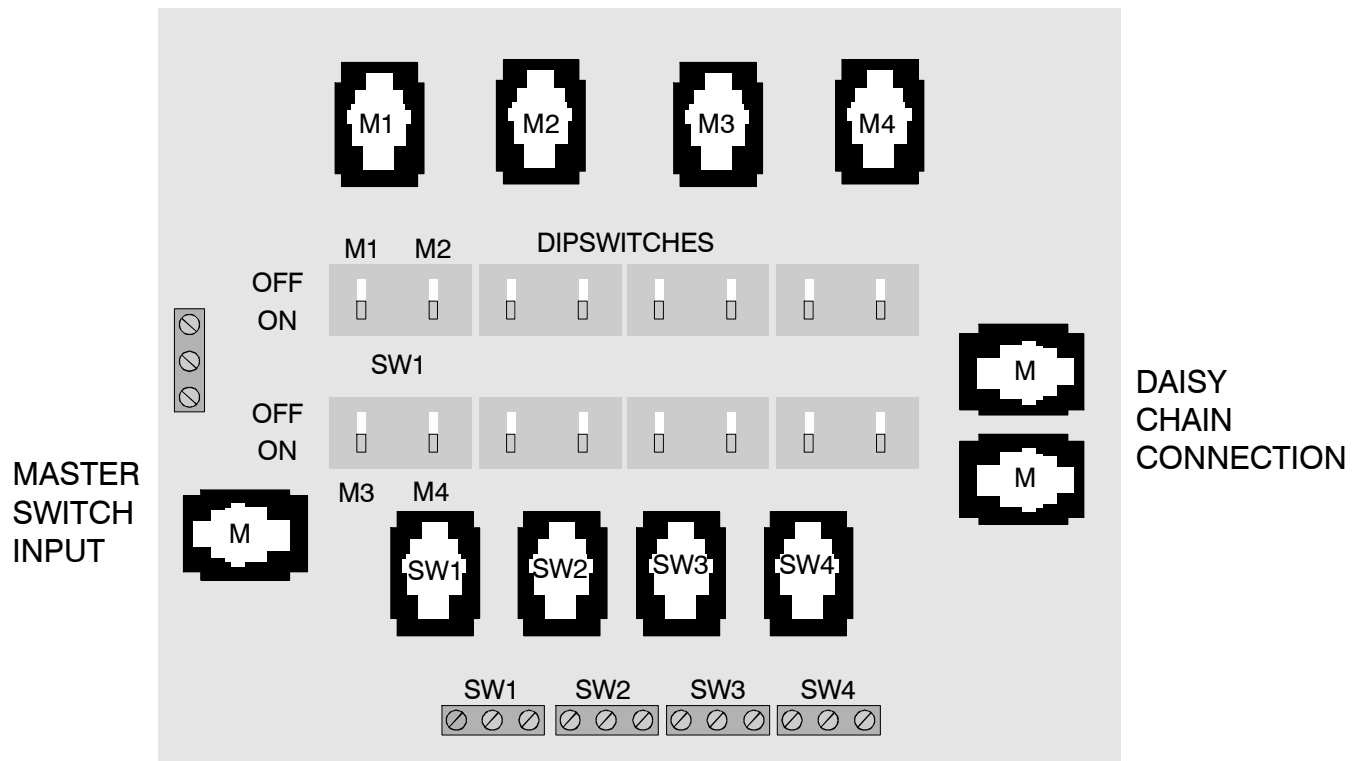


DESCRIPTION

The ILT-IGC (Catalog No. 6300721) allows individual and group control of SOMFY's ILT motors. Each individual switch can be configured to control up to four motors each. Master connections are available for group control and for connecting to multiple ILT-IGC boards.

ILT MOTOR OUTPUTS**ILT SWITCH INPUTS**

1. Connect up to four ILT motors to each ILT-IGC at the appropriate modular connection.
2. Connect up to four ILT switches (Catalog No. 6300053) at the switch inputs.
3. With all the dipswitches set in the OFF position, no motors will be controlled by a switch. Setting any dipswitch to the ON position will allow a switch to control that motor. For example, for ILT switch SW1 to control motors 1 and 2, Dipswitch SW1 should have the top two switches set ON (M1 & M2) and the bottom two switches set OFF. The same motor may be controlled by multiple switches.
4. A switch connected to the Master Input will control all the motors on each individual board, and any additional boards connected via the Daisy Chain Connection.